




Introduction

With IEC60439-3 standard, LWHT series distribution box is attractive and durable, safe and reliable, which is widely used in various places such as factories, mansions, residences, shopping centers and so on.

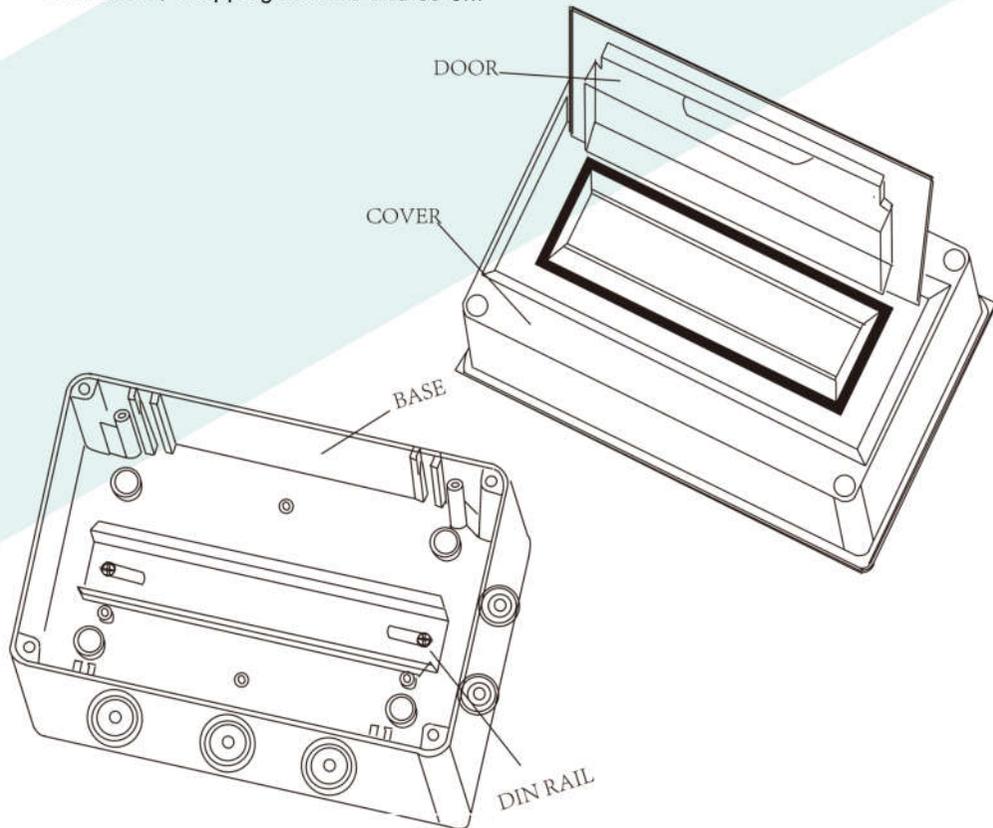

Technical Specifications


- Standard: IEC60439-3
- Approval: CE, RoHS, HF test, IK test, ISO9001
- Modules (No.) : 2;5;8;12;15;18;24
- Material: box shell: ABS; Door: PC; Zero bar/earth bar: copper
- Fire resistance: 650 °C / 30s
- Ambient temperature (°C): - 5 ~ +40, 50% humidity permitted under max +40 °C
- Storage temperature (°C): -40+ 75
- Color of base: Gray
- The color of door: Transparent
- Mounting type: Surface
- Protection grade: IP65

Accessories Introduction



Window:

Turnover transparent PC material

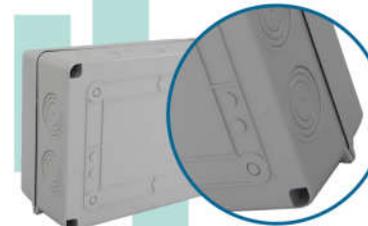

Knock-out Holes:

Optional Hole: the holes are selected as your requirement



Black Cushion:

the cushion makes sealing performance of box better, and waterproof rating up to IP65



▼ **Din-rail:**


Din-rail:35mm standard din-rail mounted



▼ **Terminals bar:**

Optional terminals

Z Installation Instructions

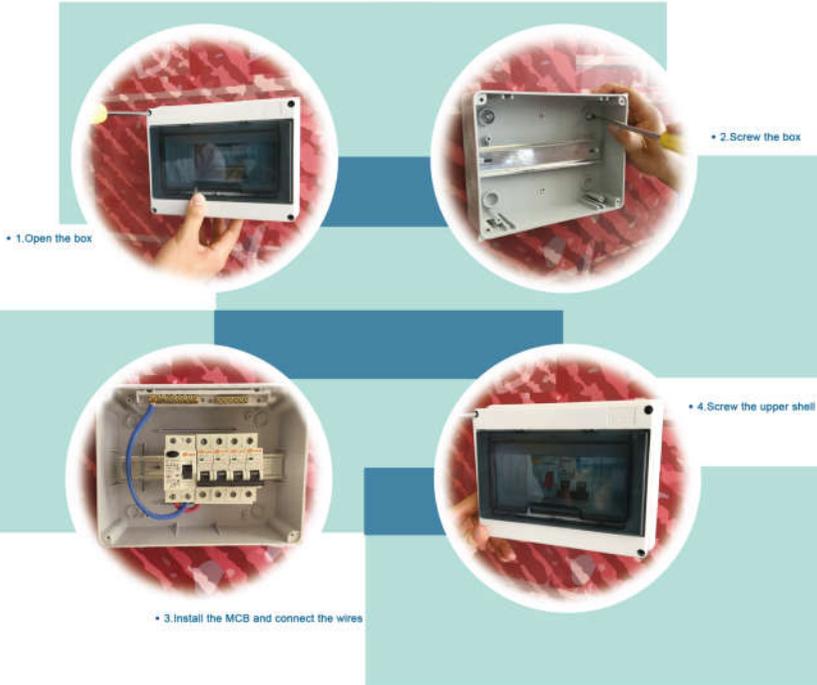

Product	Model	Din-rail (mm)	Terminal bar	(P)L*W*H (mm)	QTY/CTN	(C)W*H*D (mm)
	LWHT-2P	45	—	120X55X90	100	535X260X465
	LWHT-5P	105	3+3	119X159X90	40	495X335X475
	LWHT-8P	175	4+5	201X155X90	30	480X480X420
	LWHT-12P	230	8+5	255X198X108	20	550X400X530
	LWHT-15P	290	8+6	309X198X108	15	613X555X325
	LWHT-18P	320	8+8	363X198X100	15	610X560X380
	LWHT-24P	230*2	(8+5)*2	360X280X108	10	595X380X320

Z Outline and installation dimensions

